




**FENOPLAST®**

Fügetechnik GmbH

Kundennähe und Flexibilität ist unsere Devise

## FENOSOL® AL –ELP

Item no: 200024 - 200027

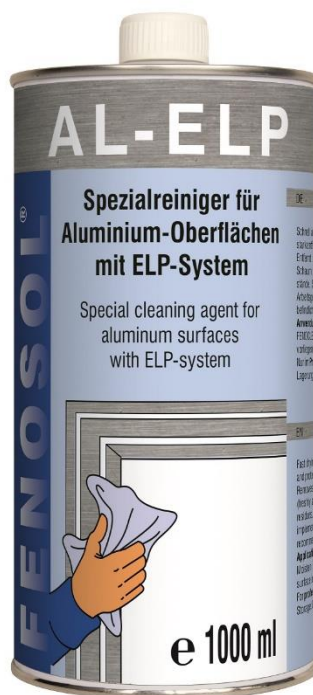

Produktinformation

### Description

FENOSOL® AL-ELP - Cleaning agent and mounting aid for aluminium surfaces.

FENOSOL® AL-ELP is an excellent all-rounder when it comes to cleaning of aluminium surfaces. Equipped with a special ELP formula it cleans anodised, painted and powder-coated surfaces quickly and thoroughly. In doing so, it protects the material-specific surfaces and has a strong degreasing effect.

FENOSOL® AL-ELP was particularly developed for the removal of non-dried adhesive. It is especially suitable for general cleaning and removal of marking aids as well as elimination of rubber traces, PUR foam (fresh), bitumen and silicone sealant (fresh), elimination of lime and mortar residues resulting from construction work.



FENOPLAST Fügetechnik GmbH  
Zur Dornheck 21-23  
35764 Sinn-Fleisbach  
Germany  
Accessed: 27.05.2019

Tel.: +49(0)2772 57587-0  
Fax: +49(0)2772 57587-20  
Email: [info@fenoplast.de](mailto:info@fenoplast.de)  
[www.fenoplast.de](http://www.fenoplast.de)  
Effective 04/2019





**FENOPLAST®**

Fügetechnik GmbH

Kundennähe und Flexibilität ist unsere Devise

## Application areas

FENOSOL® AL-ELP is used during the production and assembly of aluminium windows, doors, roller shutters and balustrades. The cleaning agent is also used in many metal-processing industries for the general final cleaning of contamination resulting from processing as well as for degreasing.

## Application

Prior to using FENOSOL® AL-ELP we recommend testing the compatibility of cleaner and the surface that is to be cleaned. For cleaning we recommend FENOCLEAN Special Cleaning Paper. Moisten Cleaning Paper with FENOSOL® AL-ELP. Then clean the surface in one direction and one go.

CAUTION: For professional use only. Please ensure that the working area is well ventilated.

Product information

2

## Technical specifications

Chemical base	Mixture of aliphatic olefins, free from aromatics with ELP-additiv
Colour	Colourless, clear
Density	0,80 g/cm³
Flashpoint	-1 °C
Ignition temperature	514 °C
Minimum processing temperature	5 °C



FENOPLAST Fügetechnik GmbH  
Zur Dornheck 21-23  
35764 Sinn-Fleisbach  
Germany  
Accessed: 27.05.2019

Tel.: +49(0)2772 57587-0  
Fax: +49(0)2772 57587-20  
Email: [info@fenoplast.de](mailto:info@fenoplast.de)  
[www.fenoplast.de](http://www.fenoplast.de)  
Effective 04/2019



**FENOPLAST®**

Fügetechnik GmbH

Kundennähe und Flexibilität ist unsere Devise

## Delivery form

Item no. 200024: 1000 ml can, 1 PU = 10 cans in a box

Item no. 200025: 10 l canister, 1 PU = 1 canister

Item no. 200026: 30 l canister, 1 PU = 1 canister

Barrel on demand

## Storage

Keep tightly closed in original container. Protect from heat. Best used: 24 months from date of production. We recommend storing the product at temperatures from + 10 °C to + 25 °C.

## Equipment

Item no. 200910: FENOCLEAN Special Cleaning Paper, 1 PU = 2 rolls with 1500 sheets each

Item no. 200941: FENOSOL® Plunger Can

**Please refer to the safety data sheet for safety-relevant data!**

NOTE: The above information can only be used as a general guide. The listed features and performance characteristics are approximate values, which are not part of the product specification. Because of the processing and application conditions outside of our influence and the multitude of different materials, we recommend to carry out sufficient self-tests. A liability for specific application results can therefore not be derived from the information and notes in this leaflet. In the context of our sales conditions, a guarantee is given solely for the consistently high quality of our products. With the publication of this edition, all previous technical information sheets are invalid.

