




**FENOPLAST®**

Fügetechnik GmbH

Kundennähe und Flexibilität ist unsere Devise

## FENOSOL® S 5 UVA

Item no: 200008 - 200011

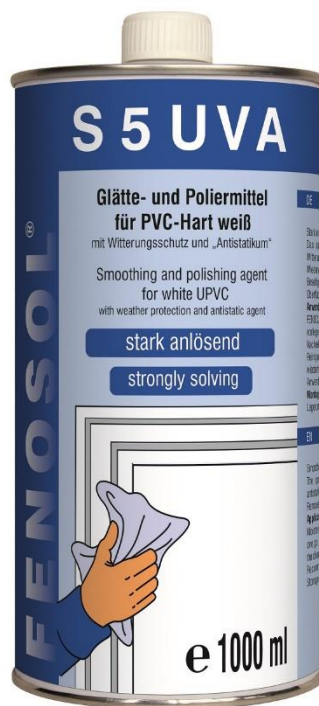

Production information

### Description

FENOSOL® S 5 UVA strongly dissolving smoothing and polishing agent for white PVC.

FENOSOL® S 5 UVA smoothing and polishing agent has a strongly dissolving effect and is particularly suitable for smoothing out scratches or cracks on white PVC, as well as for the removal of particularly stubborn staining.

The cleaner is equipped with a special UVA system. This provides a special protection which prevents re-soiling of the surfaces and ensures weather and UV protection. The antistatic effect is another special feature of the cleaner.



FENOPLAST Fügetechnik GmbH  
Zur Dornheck 21-23  
35764 Sinn-Fleischbach  
Germany  
Accessed: 27.05.2019

Tel.: +49(0)2772 57587-0  
Fax: +49(0)2772 57587-20  
Email: [info@fenoplast.de](mailto:info@fenoplast.de)  
[www.fenoplast.de](http://www.fenoplast.de)  
Effective 04/2019





## Application areas

FENOSOL® S 5 UVA is mainly used during the construction of PVC windows and is exclusively recommended for white PVC hard profile surfaces.

FENOSOL® S 5 UVA can also be used in many plastic-processing industries, such as furniture manufacturing, sign construction, construction of trade fair equipment, etc.

## Application

Prior to using FENOSOL® S 5 we recommend testing the compatibility of cleaner and the surface that is to be cleaned. For cleaning, we recommend FENOCLEAN Special Cleaning Paper.

Surfaces that are to be cleaned must be dry. In case of dirty surfaces, we recommend pre-cleaning with FENOSOL® S 20 UVA.

2

Moisten cleaning paper with FENOSOL® S 5 UVA. Then clean the surface in one direction, in one go.

FENOSOL® S 5 UVA dissolves PVC. Avoid rubbing and repetitive cleaning.

The cleaning process can be repeated after the PVC surface re-hardens. We recommend after-treatment with FENOSOL® S 10 UVA.

**CAUTION:** May only be used in production and assembly areas.

Use only on white PVC surfaces.

Production information

## Technical specifications

Chemical base	Modified alkyl ketones free of CKW
Colour	Colourless, clear
Density	0,80 g/cm <sup>3</sup>
Flashpoint	-4 °C
Ignition temperature	514 °C
Minimum processing temperature	5 °C

**FENOPLAST®**

Fügetechnik GmbH

Kundennähe und Flexibilität ist unsere Devise

## Delivery form

Item no. 200008: 1000 ml can, 1 PU = 10 cans in a box

Item no. 200009: 10 l canister, 1 PU = 1 canister

Item no. 200010: 30 l canister, 1 PU = 1 canister

Barrel on demand

## Storage

Keep tightly closed in original container. Protect from heat. Best used: 24 months from date of production. We recommend storing the product at temperatures from + 10 °C to + 25 °C.

## 3

## Equipment

Item no. 200910: FENOCLEAN Special Cleaning Paper, 1 PU = 2 rolls with 1500 sheets each

Item no. 200020: FENOSOL® S 20 UVA 1000 ml can, 1 PU = 10 cans in a box

Item no. 200016: FENOSOL® S 10 UVA 1000 ml can, 1 PU = 10 cans in a box

Item no. 200941: FENOSOL® Plunger Can

**Please refer to the safety data sheet for safety-relevant data!**

NOTE: The above information can only be used as a general guide. The listed features and performance characteristics are approximate values, which are not part of the product specification. Because of the processing and application conditions outside of our influence and the multitude of different materials, we recommend to carrying out sufficient self-tests. A liability for specific application results can therefore not be derived from the information and notes in this leaflet. In the context of our sales conditions, a guarantee is given solely for the consistently high quality of our products. With the publication of this edition, all previous technical information sheets are invalid.

